



art. **0062**

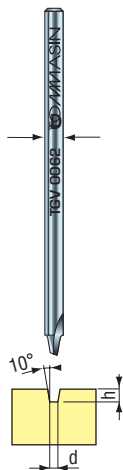

STANDARD

D	3
d	0,5 ÷ 1,5
α	10°


art. **0161/A**

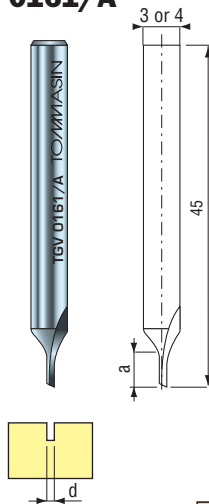

STANDARD

D	4	6
d	0.6 ÷ 2.5	2.6 ÷ 3.5
a	1.8 ÷ 3.5	3.5 ÷ 4.8

*art. **0161/B**

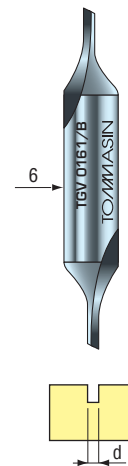

Da usare su pantografi o fresatrici ad altissima velocità:
(24.000 ÷ 28.000 R.P.M.).

They have to be used on pantographs or milling machines at very high speed.