



art. **0212/L-Z2**

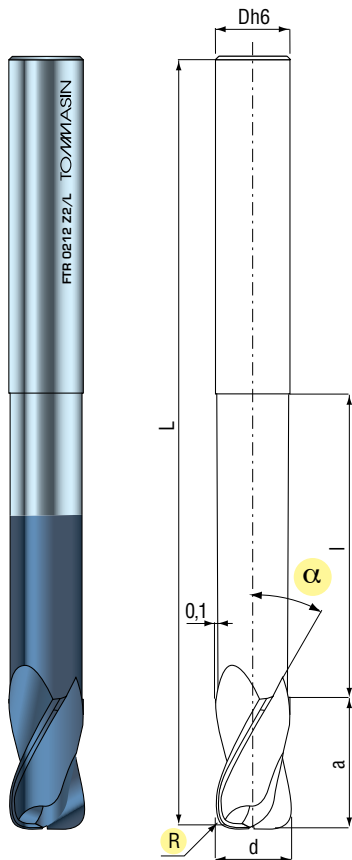

art. **0213/L-Z4**

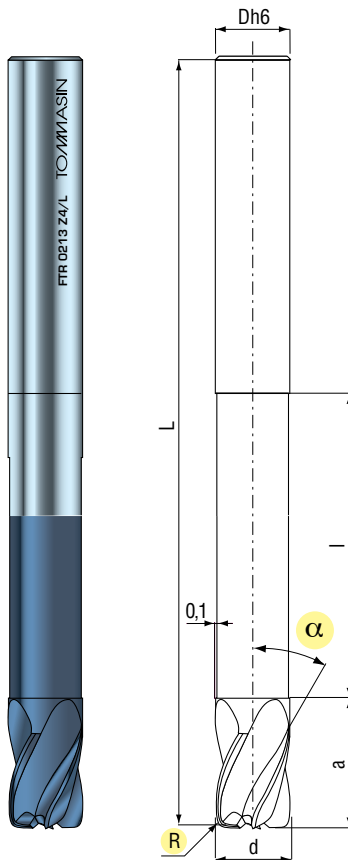

STANDARD

| d=D | R | l | L | a | α |
|------|-----|----|-----|----|-----|
| 6,0 | 0,5 | 32 | 80 | 8 | 30° |
| 6,0 | 1,0 | 32 | 80 | 8 | 30° |
| 8,0 | 0,5 | 40 | 100 | 11 | 30° |
| 8,0 | 1,0 | 40 | 100 | 11 | 30° |
| 8,0 | 1,5 | 40 | 100 | 11 | 30° |
| 10,0 | 0,5 | 45 | 106 | 13 | 35° |
| 10,0 | 1,0 | 45 | 106 | 13 | 35° |
| 10,0 | 1,5 | 45 | 106 | 13 | 35° |
| 10,0 | 2,0 | 45 | 106 | 13 | 35° |
| 12,0 | 1,0 | 52 | 120 | 15 | 35° |
| 12,0 | 1,5 | 52 | 120 | 15 | 35° |
| 12,0 | 2,0 | 52 | 120 | 15 | 35° |
| 14,0 | 1,5 | 60 | 150 | 19 | 35° |
| 14,0 | 2,0 | 60 | 150 | 19 | 35° |
| 16,0 | 2,0 | 60 | 150 | 19 | 35° |

ricopertura TiAlN
coating TiAlN